



ALL series

PRODUCT APPLICATION ▼



Confidence & Creativity

Service & Sincerity

Belief & Bravery

Energy Of Infinity

Product Manual





As a world leading manufacturer of Valve Regulated Lead-Acid (VRLA) batteries, CSB's products are utilized in over 52 countries in telecommunications, UPS, emergency lighting, security and more. Founded in 1986, CSB has evolved into an international company providing over 4 million batteries monthly.

CSB's demand for producing high quality batteries is the main reason for its' growth. The wide array of CSB customers have come to know and trust the quality and reliability of its' products and services. CSB is committed to developing next generation VRLA products and growing its' worldwide distribution network.

With over 2500 people, CSB is confident in providing you a better and more reliable solution.

EVH series



- Characteristics: Increased cycle life up to 122% and power output up to 25% versus standard lead acid batteries.
- Application: For machines that need rechargeable power supplies for intensive use, such as electric vehicle, portable machines, and camera, etc.
- Capacity : 15Ah ~ 39Ah (20h)

EVX series



- Characteristics: Increased cycle life up to 122% versus standard lead acid battery.
- Application: For machines that need rechargeable power supplies for intensive use, such as electric vehicle, portable machines, and camera, etc.
- Capacity : 7.2Ah ~ 75Ah (20h)

GP series



- Characteristics: Wide range application provides hundreds to thousands of recharge cycles, up to 5 years.
- Application: UPS, emergency lighting, and security alarm, etc.
- Capacity : 2.2Ah ~ 100Ah (20h)

GPL series



- Characteristics: Long life, wide range application. (Up to 10 years expected long life under normal float charge)
- Application: UPS, emergency lighting, security alarm, telecommunication system etc.
- Capacity : 7.2Ah~100Ah (20h)

HR series



- Characteristics: high rate discharge.
- Application: UPS, emergency lighting, and security alarm, etc.
- Capacity : 18W ~ 120W (15min)

HRL series



- Characteristics: Long life, high rate discharge. (Up to 10 years expected long service life under normal float charge)
- Application: UPS, emergency lighting, and security alarm, etc.
- Capacity : 10W~540W (15min)

TPL series



- Characteristics: Front access, long life, space saving design.
- Application: UPS, wireless, telecom and transmission.
- Capacity : 80Ah~150Ah (8h)

UPS series



- Characteristics: Wide range application provides hundreds to thousands of recharge cycles, life expectancy up to 5 years.
- Application: UPS, emergency lighting, and security alarm, etc.
- Capacity : 240W ~ 580W (5min)

XHRL series




- Characteristics: Long life, extreme high rate discharge. (Up to 10 years expected long life under normal floating charge)
- Application: UPS, emergency lighting, and security alarm, etc.
- Capacity : 360W ~ 620W(15min)

XTV series




- Characteristics: Extreme temperature range. (-20°C ~ 50°C)
- Application: Telecommunication equipment, UPS, emergency lighting, and security alarm, etc.
- Capacity : 7.2Ah~110Ah(20h)

Terminal Position

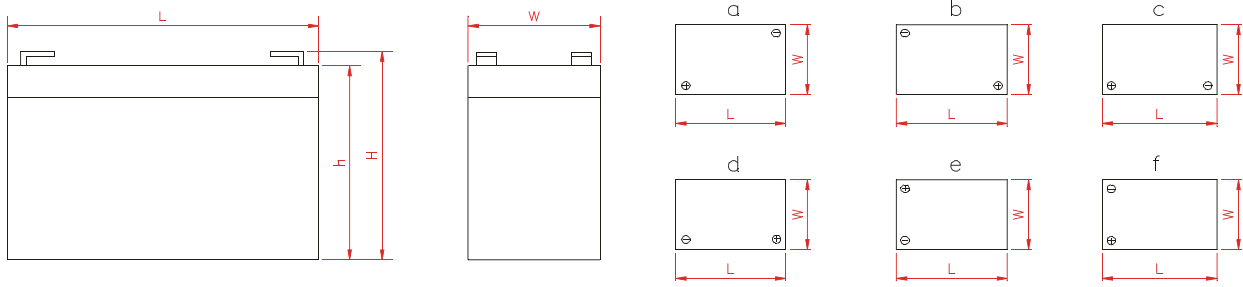

Terminal Type

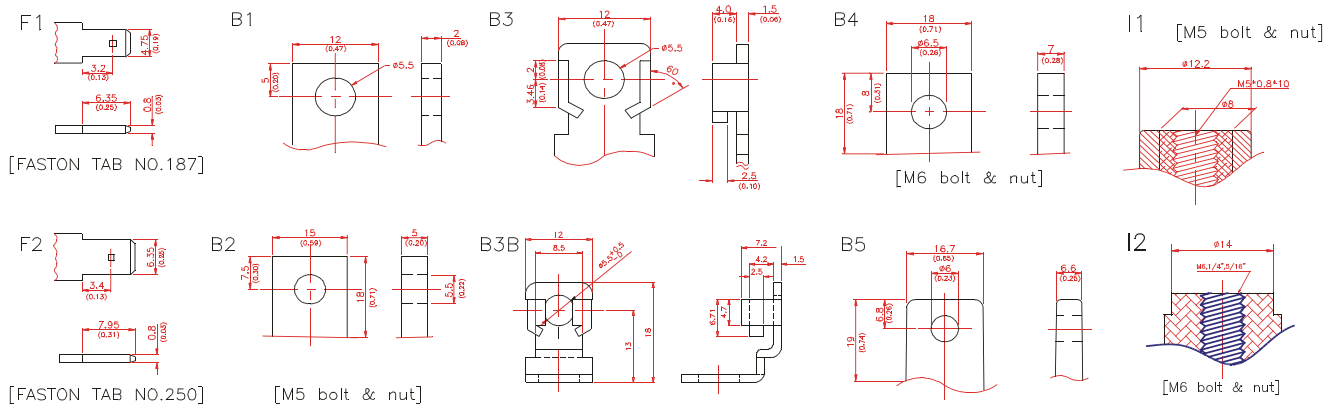

EVH Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (20Hr)(Ah)	Weight (Approx. Kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
EVH12150	12	15	4.60	104	32.60	11.00	180	101.8±1.5	97.5±1.0	151±2.0	98±1.0	--	F2	4.50	--	--
EVH12240	12	24	7.55	118.6	38.15	9.00	320	170±1.0	170±1.0	181±2.0	76.2±1.0	d	I4	7.20	65/56	6.37
EVH12390	12	39	11.50	118.9	40.70	8.00	400	178.3±2.0	154.8±2.0	195.6±2.0	130±1.5	c	B5	11.70	127/110	12.45

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C

• Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

EVH12150X2(2nd generation) is an improved product, please reference to the CSB website for the updated specification.

EVX Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (20Hr)(Ah)	Weight (Approx. Kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
EVX1272	12	7.2	2.55	93.6	33.88	26.00	100/130	100±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	2.16	--	--
EVX12120	12	12.0	3.83	103.5	37.60	18.50	150/180	100±1.0	94±1.0	151±2.0	98±1.0	e	F1/F2	3.60	--	--
EVX12170	12	17.0	5.67	89.4	35.98	16.50	230	167±2.0	165.5±2.0	181±2.0	76.2±1.0	d	B1/B3	5.10	65/56	6.37
EVX12200	12	20.0	6.70	108.8	35.82	14.00	230	167±2.0	160±2.0	181±2.0	76.2±1.0	d	I1	6.00	65/56	6.37
EVX12260	12	26.0	8.65	88.0	36.07	11.50	350	125±1.5	122±1.5	175±2.0	166±2.0	d	B1/B3/B3B/I1	7.80	65/56	6.37
EVX12300	12	30.0	10.40	99.1	34.62	9.00	400	175±2.0	175±2.0	166±2.0	125±1.5	c	I1	9.00	65/56	6.37
EVX12340	12	34.0	10.77	103.7	37.88	8.50	400	178.3±2.0	154.8±2.0	195.6±2.0	130±1.5	c	B5	10.20	127/110	12.45
EVX12400	12	40.0	12.73	87.6	37.71	10.00	400	170±2.0	168.5±2.0	197±2.0	165±2.0	d	B2/I1	12.00	65/56	6.37
EVX12520	12	52.0	18.30	90.3	34.10	5.50	500	219.3±2.0	201.3±2.0	248±2.0	138.4±1.5	c	B4	15.60	127/110	12.45
EVX12650	12	65.0	22.20	78.0	35.14	8.00	500	174±2.0	172.5±2.0	349.4±2.5	166±2.0	d	B4	19.50	127/110	12.45
EVX12750	12	75.0	27.00	92.0	33.33	4.50	500	233.2±2.5	211.2±2.5	275±2.5	168.5±2.0	c	B6	22.50	286/248	28.05

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C

• Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

GP Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (20hr)(Ah)	Weight (Approx. kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
GP645	6	4.5	0.84	78.8	32.14	19.00	60/90	108±1.5	102±1.5	70±1.0	48±1.0	a	F1/F2	1.35	--	--
GP672	6	7.2	1.22	89.5	35.50	15.50	100/130	100±1.0	94±1.0	151±2.0	34±1.0	c	F1/F2	2.16	--	--
GP6120	6	12.0	1.85	101.5	38.92	8.50	150/180	100±1.0	94±1.0	151±2.0	50±1.0	c	F1/F2	3.60	--	--
GP1222	12	2.2	0.90	72.7	29.33	63.00	40/60	66±1.0	60±1.0	178±0.5	34±0.5	c	F1/F2	0.66	--	--
GP1245	12	4.5	1.66	81.6	32.53	40.50	60/90	108±1.5	102±1.5	92.8±1.0	69.9±1.0	c	F1/F2	1.35	--	--
GP1272	12	7.2	2.40	93.6	36.00	23.00	100/130	100±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	2.16	--	--
GP12120	12	12.0	3.67	103.5	39.24	16.00	150/180	100±1.0	94±1.0	151±2.0	98±1.0	e	F1/F2	3.60	--	--
GP12170	12	17.0	5.50	89.4	37.09	16.00	230	167±2.0	165.5±2.0	181±2.0	76.2±1.0	d	B1/B3	5.10	65/56	6.37
GP12200	12	20.0	6.40	108.8	37.50	13.00	230	167±2.0	160±2.0	181±2.0	76.2±1.0	d	I1	6.00	65/56	6.37
GP12260	12	26.0	8.45	88.0	36.92	11.00	350	125±1.5	122±1.5	175±2.0	166±2.0	d	B1/B3/B3B/I1	7.80	65/56	6.37
GP12340	12	34.0	10.48	103.7	38.93	8.00	380	178.3±2.0	154.8±2.0	195.6±2.0	130±1.5	c	B5	10.20	127/110	12.45
GP12400	12	40.0	12.63	87.6	38.00	8.10	400	170±2.0	168.5±2.0	197±2.0	165±2.0	d	B2/I1	12.00	65/56	6.37
GP12650	12	65.0	20.00	78.0	39.00	5.5	500	174±2.0	172.5±2.0	349.4±2.5	166±2.0	d	B4	19.50	127/110	12.45
GP121000	12	100.0	31.20	95.9	38.46	4.50	800	217.6±2.5	214.6±2.5	343±2.5	170±2.0	f	I2	30.00	127/110	12.45

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C
 • Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

Type	Nominal Voltage(V)	Nominal Capacity (15min)(Wh/cell)	Weight (Approx. kg)	Energy Density (wh/L)	Specific Energy (wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Charging(V)	
								Height Over Terminal (H)	Container Height (h)	Length (L)	Width (W)				Standby Use	Cycle Use
GP1245 (16W)	12	16	1.34	37.4	17.91	28.50	60/90	106±1.5	101.8±1.5	90±1.0	70±1.0	c	F1/F2	1.35	2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C	2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C
GP1272 (28W)	12	28.7	2.10	46.7	20.50	21.00	100/130	98.3±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	2.16	2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C	2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

GPL Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (20hr)(Ah)	Weight (Approx. kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
GPL672	6	7.2	1.37	89.5	31.53	13.50	100/130	100±1.0	94±1.0	151±2.0	34±1.0	c	F1/F2	2.16	---	---
GPL1272	12	7.2	2.60	93.6	33.23	21.00	100/130	100±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	2.16	---	---
GPL12120	12	12.0	4.10	103.5	35.12	14.00	150/180	100±1.0	94±1.0	151±2.0	98±1.0	e	F1/F2	3.60	---	---
GPL12260	12	26.0	8.30	88.0	37.59	11.00	350	125±1.5	122±1.5	175±2.0	166±2.0	d	B1/B3/B3B/I1	7.80	65/56	6.37
GPL12400	12	40.0	14.50	87.6	33.10	7.00	400	170±2.0	168.5±2.0	197±2.0	165±2.0	d	B2/I1	12.00	65/56	6.37
GPL12520	12	52.0	18.00	94.0	34.67	5.50	500	219.3±2.0	210.3±2.0	228±2.0	138.4±2.0	c	B4	15.60	127/110	12.45
GPL12750	12	75.0	25.60	96.9	35.16	4.50	800	214.2±2.5	211.2±2.5	261±2.5	168.5±2.0	c	I2	22.50	127/110	12.45
GPL12880	12	88.0	29.70	95.8	35.56	4.50	800	214.3±2.5	211.3±2.5	308.7±2.5	169±2.0	c	I2	26.40	127/110	12.45
GPL121000	12	100.0	33.50	95.9	35.82	3.50	800	217.6±2.5	214.6±2.5	343±2.5	170±2.0	c	I2	30.00	127/110	12.45

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C
 • Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C



HR Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (15min) (W/cell)	Weight (Approx. Kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height(H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
HR1218W	12	18	1.53	37.3	17.65	27.80	100/130	98.3±1.0	94±1.0	151±2.0	51±1.0	e	F1/F2	1.80	--	--
HR1221W	12	21	1.80	49.1	17.50	25.00	60/90	106±0.5	101.8±0.5	90±0.5	70±0.5	c	F1/F2	2.10	--	--
HR1224W	12	24	1.95	49.7	18.46	21.00	100/130	98.3±1.0	94±1.0	151±2.0	51±1.0	e	F1/F2	2.40	--	--
HR1227W	12	27	1.97	63.1	20.56	19.00	100/130	106±1.5	101.8±1.5	90±1.0	70±1.0	c	F1/F2	2.70	--	--
HR1234W	12	34	2.50	55.3	20.40	19.00	100/130	98.6±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	3.40	--	--
HR1251W	12	51	3.72	55.0	20.56	13.00	150/180	100±1.0	94±1.0	151±2.0	98±1.0	e	F1/F2	5.10	--	--
HR1290W	12	90	6.80	61.2	20.00	9.00	300	167±2.0	160±2.0	181±2.0	76.2±1.0	d	I1/B1B	9.00	65/56	6.37
HR12120W	12	120	10.20	52.1	17.65	9.00	400	175±2.0	166.5±2.0	166±2.0	125±1.5	c	I1	12.00	65/56	6.37

Charging(V) : • Standby Use : 2.275V±0.025/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C

• Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

HRL Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (15min) (W/cell)	Weight (Approx. kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
HRL634W	6	34	1.32	52.8	19.32	10.00	130	98.3±1.0	94±1.0	151±2.0	34±1.0	c	F2	3.40	--	---
HRL1210W	12	10	1.10	38.7	13.64	35.00	40	70±1.0	64±1.0	178±2.0	34±1.0	c	F2	1.00	--	---
HRL1223W	12	23	2.10	53.8	16.43	19.00	130	106±1.5	101.8±1.5	90±1.0	70±1.0	c	F2	2.30	--	---
HRL1234W	12	34	2.70	55.3	18.89	17.00	130	98.3±1.0	94±1.0	151±2.0	65±1.0	e	F2	3.40	--	---
HRL1280W	12	80	6.80	54.4	18.46	9.00	300	167±2.0	160±2.0	181±2.0	76.2±1.0	d	I1	8.00	65/56	6.37
HRL12110W	12	110	9.90	48.0	16.67	9.00	165	175±2.0	165.5	166±2.0	125±1.5	c	I1	11.00	65/56	6.37
HRL12150W	12	150	11.75	59.6	19.15	7.00	225	172±2.0	148.5±2.0	195.6±2.0	130±1.5	c	I2	15.00	127/110	12.45
HRL12200W	12	200	17.60	47.0	17.05	5.90	300	207.3±2.5	202.3±2.5	228±2.5	138.4±1.5	c	I2	20.00	127/110	12.45
HRL12280W	12	280	25.80	45.2	16.28	4.00	800	214.2±2.5	211.2±2.5	261±2.5	168.5±2.0	c	I2	28.00	127/110	12.45
HRL12330W	12	330	29.60	44.9	16.72	4.00	800	214.3±2.5	211.3±2.5	308.7±2.5	169±2.0	c	I2	33.00	127/110	12.45
HRL12390W	12	390	33.00	46.9	17.73	4.00	800	217.6±2.5	214.6±2.5	342±2.5	170±2.0	c	I2	39.00	127/110	12.45
HRL12500W	12	500	45.70	46.8	16.41	3.70	800	277.7±2.5	274.7±2.5	343±2.5	170±2.0	c	I2	50.00	127/110	12.45
HRL12540W	12	540	43.90	50.8	18.45	4.00	800	275.7±2.5	273.2±2.5	343±2.5	170±2.0	c	I2	54.00	127/110	12.45

Charging(V) : • Standby Use : 2.275V±0.025/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C

• Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C



TPL Series

Battery Type	Nominal Voltage (V)	Nominal Capacity (8Hr) (Ah)	Weight (Approx. Kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance, Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)			Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
TPL12800	12	80	36.00	67.1	26.67	4.50	800	256.7±2.5	512±2.5	112.8±1.5	e	I2	24.00	91/79	8.92
TPL12900	12	90	36.00	75.5	30.00	4.50	800	256.7±2.5	512±2.5	112.8±1.5	e	I2	27.00	91/79	8.92
TPL121000	12	100	36.00	83.9	33.33	4.50	800	256.7±2.5	512±2.5	112.8±1.5	e	I2	30.00	91/79	8.92
TPL121000T	12	100	32.7	104.7	36.7	5.00	800	280±2.5	390±2.5	105±1.5	e	I2	30.00	91/79	8.92
TPL121250A	12	125	44.00	66.3	34.09	6.50	800	323±2.5	558.4±2.5	125.6±1.5	e	I2	37.50	91/79	8.92
TPL121350A	12	135	52.80	71.6	30.68	6.50	800	323±2.5	558.4±2.5	125.6±1.5	e	I2	40.50	91/79	8.92
TPL121500A	12	150	52.80	79.5	34.09	6.50	800	323±2.5	558.4±2.5	125.6±1.5	e	I2	45.00	91/79	8.92

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C
 • Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

UPS Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (5min) (W/cell)	Weight (Approx. Kg)	Energy Density (wh/L)	Specific Energy (wh/kg)	Internal Resistance, Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Charging(V)	
								Height Over Terminal (H)	Container Height (h)	Length (L)	Width (W)				Standby Use	Cycle Use
UPS122406	12	240	1.45	27.6	13.79	32.00	100/130	98.3±1.0	94±1.0	151±2.0	51±1	e	F1/F2	2.00	2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C	2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C
UPS123606	12	360	1.97	41.4	15.22	22.00	100/130	98.3±1.0	94±1.0	151±2.0	51±1	e	F1/F2	3.00		
UPS123607	12	360	1.97	32.5	15.22	22.00	100/130	98.3±1.0	94±1.0	151±2.0	65±1.0	e	F1/F2	3.00		
UPS12460	12	460	2.50	41.5	15.33	18.00	130	98.3±1.0	94±1.0	151±2.0	65±1.0	e	F2	3.60		
UPS12580	12	580	2.83	52.4	17.07	12.50	130	98.3±1.0	94±1.0	151±2.0	65±1.0	e	F2	3.76		

XTV Series

Battery Type	Nominal Voltage (V)	Nominal Capacity (10Hr) (Ah)	Weight (Approx. kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance, Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
XTV1272	12	7.2	2.57	93.6	33.62	21.00	130	100±1.0	94±1.0	151±2.0	65±1.0	e	F2	2.16	--	--
XTV12550	12	55	17.90	103.4	36.87	5.00	300	207.3±2.5	202.3±2.5	228.0±2.5	138.4±1.5	c	I2	16.50	138.6(414)/120.3(359.4)	13.58
XTV12800	12	80	25.50	103.9	37.65	4.50	800	213.9±2.5	210.5±2.5	261.0±2.5	168.5±2.0	c	I2	24.00	138.6(414)/120.3(359.4)	13.58
XTV121000	12	100	30.20	108.9	39.74	3.90	800	214.3±2.5	211.3±2.5	308.7±2.5	169.0±2.0	c	I2	30.00	138.6(414)/120.3(359.4)	13.58
XTV121100	12	110	34.20	105.6	38.60	3.40	800	217.3±2.5	214.3±2.5	343.0±2.5	170.0±2.0	c	I2	33.00	138.6(414)/120.3(359.4)	13.58

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C
 • Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

XHRL Series

Battery Type	Nominal Voltage(V)	Nominal Capacity (15min) (W/cell)	Weight (Approx. kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance, Approx. (mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf-cm / lbf-in	N-m
XHRL 12360W	12	360	27.50	58.1	19.64	4.00	800	214.2±2.5	211.2±2.5	261±2.5	168.5±2.0	c	I2	36.00	91/79	8.92
XHRL 12410W	12	410	31.00	55.8	19.84	4.00	800	214.2±2.5	211.3±2.5	308.7±2.5	169±2.0	c	I2	41.00	91/79	8.92
XHRL 12475W	12	475	35.30	56.9	20.18	3.70	800	217.9±2.5	214.6±2.5	343±2.5	170±2.0	c	I2	47.50	91/79	8.92
XHRL 12620W	12	620	47.20	58.2	19.70	3.70	800	275.9±2.5	273.9±2.5	343±2.5	170±2.0	c	I2	62.00	91/79	8.92

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C
 • Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

All information is subject to change without (prior) notification. Please consult CSB website (www.csb-battery.com) for latest information.

SALES OFFICE

GLOBAL HQ

CSB BATTERY CO., LTD.
11F, No. 150, Sec. 4, Chengde Rd.,
Shilin Dist., Taipei City 11167,
Taiwan (R.O.C.)
Tel : +886-2-2880-5600
Fax : +886-2-2888-3300
E-mail : service@csb-battery.com.tw

EUROPE HQ

CSB Battery Europe BV.
Keurmeesterstraat 28-30
2984 BA
Ridderkerk
The Netherlands
Tel : +31 (0) 180418140
Fax : +31 (0) 180418327
E-mail : eurosales@csb-battery.eu

BENELUX OFFICE

CSB BATTERY BENELUX B.V
Keurmeesterstraat 28-30
2984 BA Ridderkerk
The Netherlands
Tel : +31 (0) 180413098
Fax : +31 (0) 180418327
E-mail : eurosales@csb-battery.eu

SPAIN OFFICE

CSB BATTERY IBERICA S.L.
Calle Doctor Esquerdo, 167 1 A y B.
28007 Madrid,
Spain
Tel : +34 - 686409770
E-mail : eurosales@csb-battery.eu

ITALY OFFICE

CSB BATTERY ITALIA S.R.L
Corso Sempione 77
20149 Milano
Italy
Tel : +39-800797614
E-mail : eurosales@csb-battery.eu

SHANGHAI OFFICE (CHINA)

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
Room2105, Qiang Sheng Tower, Pu Jian Rd.,
Shanghai, China
PC : 200127
Tel : +86-21-50461622 / +86-21-50460833 /
+86-21-50460094
Fax : +86-21-50461046
E-mail : chinasl@csb-battery.com

MANUFACTURING SITE

CHINA FACTORY

CSB BATTERY GUANGZHOU CO., LTD.
No 97, Tianyuan Road, Yonghe Area,
Guangzhou Economic Technology Development
Zone, P.R.C.
Postcode:511356
Tel : +86-20-8297-9716
Fax : +86-20-8297-9719

TAIWAN FACTORY

CSB BATTERY (GUAN TYAN) FACTORY.
No.16, Gongye W. Rd., Ell Jenn Vil.,
Guantian Dist., Tainan City 72048,
Taiwan (R.O.C.)
Tel : +886-6-698-7600
Fax : +886-6-698-5734

VIETNAM FACTORY

CSB Battery (VIETNAM) CO., LTD.
Nhon Trach 3 IP , Second Phase ,
Nhon Trach District , Dong Nai Province
Vietnam
Tel : +84-61-3569120
Fax : +84-61-3569165

AMERICA HQ

CSB BATTERY TECHNOLOGIES INC.
2901, White Settlement Rd.
Ft. Worth, TX 76107
U.S.A
Tel : +1-817-244-7777 /
1-(800)3-CSB-USA(272872)
Fax : +1-817-244-4445
E-mail : csb@csb-battery.com

FRANCE OFFICE

CSB BATTERY FRANCE S.A.R.L
10, rue Boris Vian
95310 Saint Ouen l'Aumône
France
Tel : +33 (0) 134201746
Fax : +33 (0) 134201748
E-mail : eurosales@csb-battery.eu

UK OFFICE

CSB BATTERY UK LTD
Cobourg House, Mayflower Street,
Plymouth PL1 1LG,
United Kingdom
Tel : +44 (0) 8082345420
E-mail : eurosales@csb-battery.eu

GERMANY OFFICE

CSB BATTERY DEUTSCHLAND GMBH
Südliche Auffahrtsallee 75
80639 Munchen (Nymphenburg)
Germany
Tel : +49 (0) 8001821171
E-mail : eurosales@csb-battery.eu

BEIJING OFFICE (CHINA)

CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD.
Room 702, 12th Building, Wanda Plaza,
Jianguo Rd., Chaoyang Dis.,
Beijing, China
PC : 100022
Tel : +86-10-58205336 / +86-10-58205338
Fax : +86-10-58203053
E-mail : chinasl@csb-battery.com

SHENZHEN OFFICE (CHINA)

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
SHEN ZHEN BRANCH
Room 2103-2105, Block East,
City Professional Hub, Shennan Avenue, Futian,
Shenzhen, China
PC : 518040
Tel : +86-755-88316488 / 6775 / 6075
Fax : +86-755-88316548
E-mail : she@csb-battery.com.cn

CSB Powers Your Business



CSB-manufactured VRLA (Absorbent Glass Mat type) batteries are UL-recognized components under UL1989. CSB is also certified by ISO 9001 and ISO 14001 and TL 9000 Certified.

In accordance with IEC60896-21/22:2004
In accordance with BS6290-4

1406-1000-ALL

www.csb-battery.com