

BATTERY
CSB



WAY TO THE FUTURE
CSB WITH YOU

MU series

Large Capacity
Up to 20 years
Space Saving Design
Stability, Dependability and Reliability

ENERGY OF INFINITY ▼

Confidence & Creativity
Service & Sincerity
Belief & Bravery

MU

MU series

Applications

- Telecom Systems.
- With VRLA technology.
- Switching Mode Rectifier Power Supply.
- Power Equipment Operation.
- Fire Alarms/Security Systems.
- Emergency Lighting.
- Back-up Power for Testing and Measuring Equipment.
- UPS.
- Solar Battery Systems.
- Replacement for Open-type Stationary Lead Acid Batteries.
- Service life of up to 20 years (standby).




Features

- Single-cell batteries.
- Vertically and horizontally mounted storage batteries.
- Unit construction can reduce installation space and time. High-quake resistance. Since two(2)-six(6) cells are housed in an iron frame as one unit and can be combined up to the necessary capacity; there is no need for a battery rack. This can reduce installation space 40-50% and cut installation time in half.
- Container and cover made of flame retardant plastic (UL 94V-0).
- Up to 20 years of life expectancy.
- No water additions or specific gravity measurements are required. There is also no need for an equalization charge. These advantages reduce maintenance expenses.
- The MU series battery can be installed horizontally, with the terminals lining up on the front side, making inspection and voltage readings easier. Since the number of terminals may decrease, checking time can be shortened.


- The MU series battery is manufactured in accordance with JIS C 8707 and qualified by the Battery Equipment Approval Committee of Japan for use in fire alarms, security systems and emergency lighting systems (Approval No.00C 244).
- The MU series battery meets NQAS requirements specified by NTT (Approval No. NQAS 95-1007).
- Grid corrosion resistance is improved through our newly developed lead-calcium-tin alloy, which provides longer life (up to 20 years in float service at 25°C).
- The MU series battery range is in line with EUROBAT specifications for "High Integrity" (10+ years in floating charge conditions).



Expected Life V.S Operating Temperature


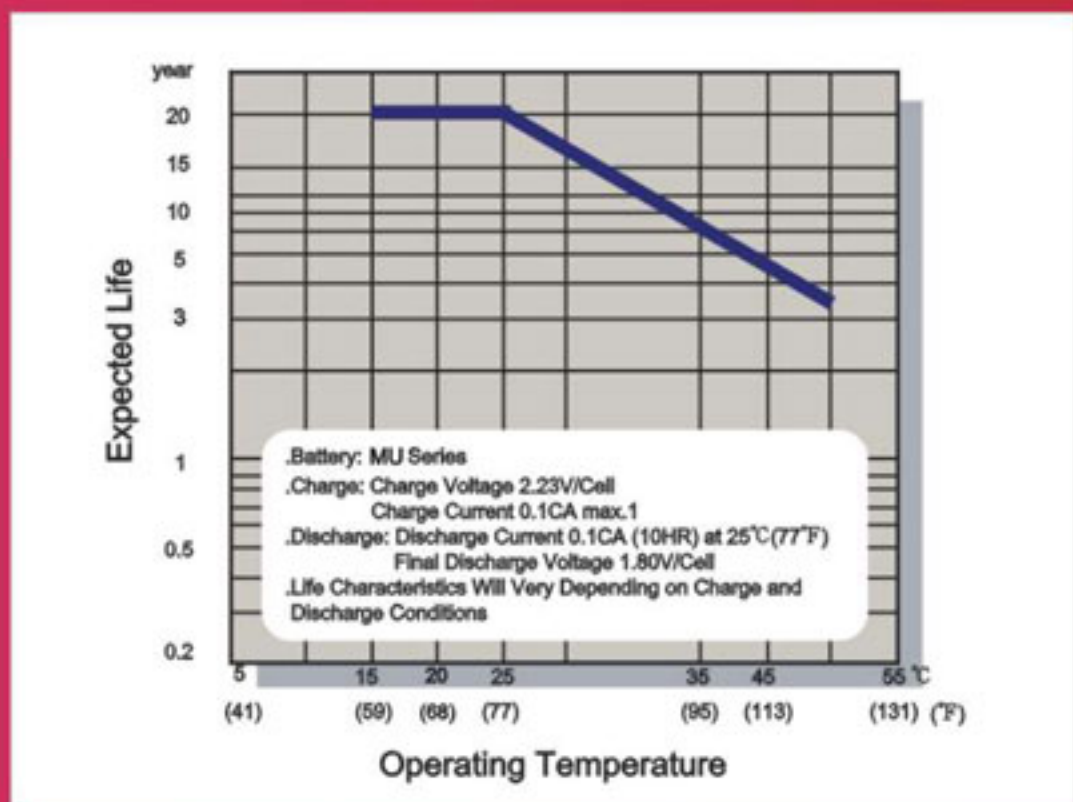


Typical Constant Voltage Charge Characteristics

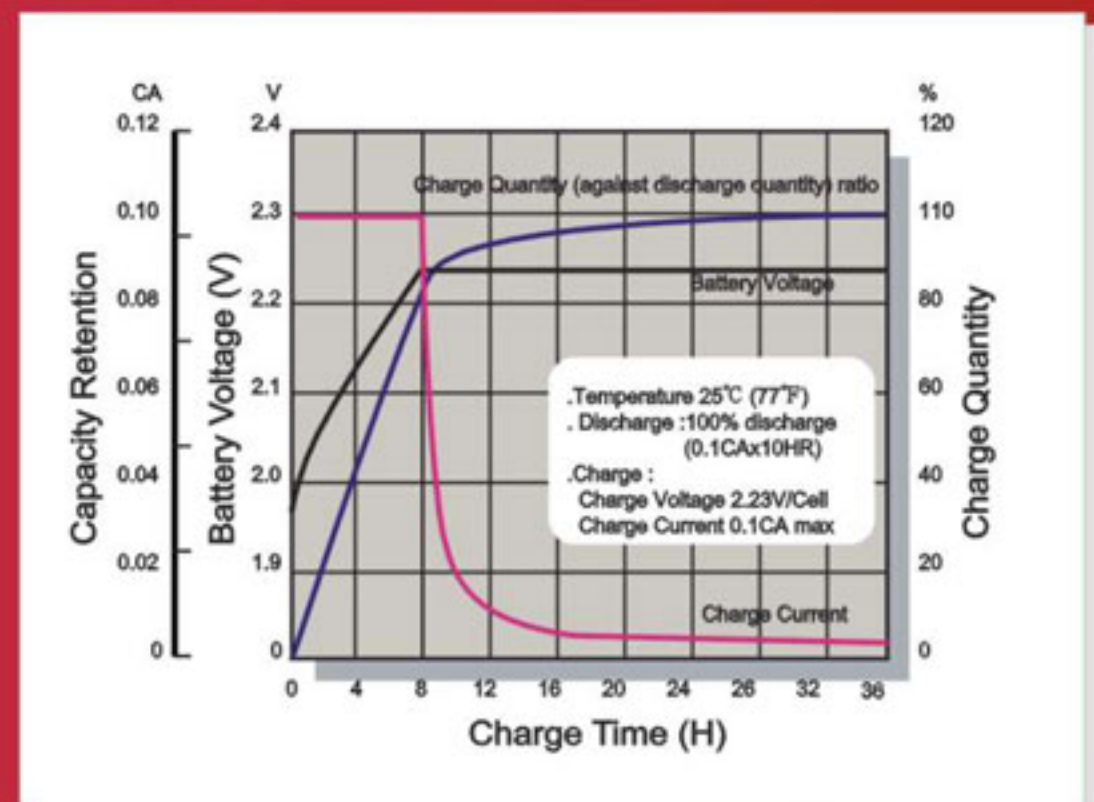



Capacity Retention Characteristics

Discharge Characteristics

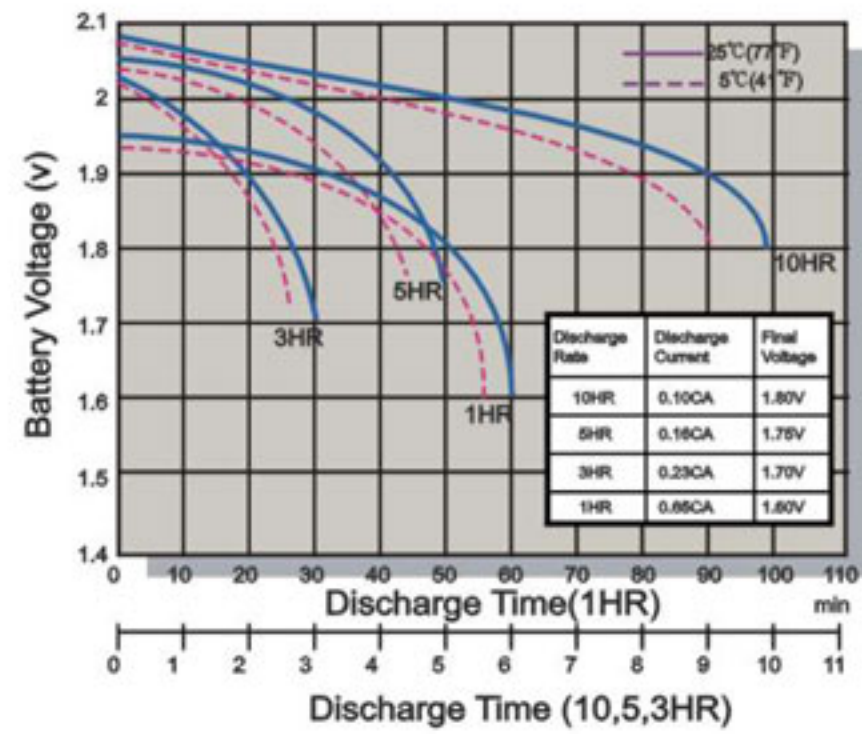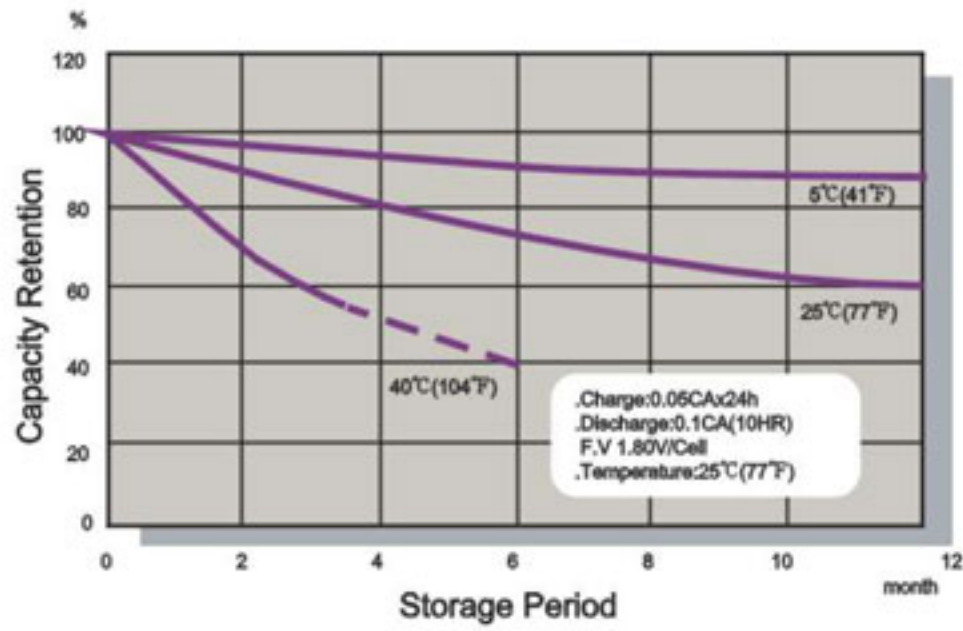

Oxygen Recombination Efficiency Chart

Terminal Voltage (v) and Discharge Time

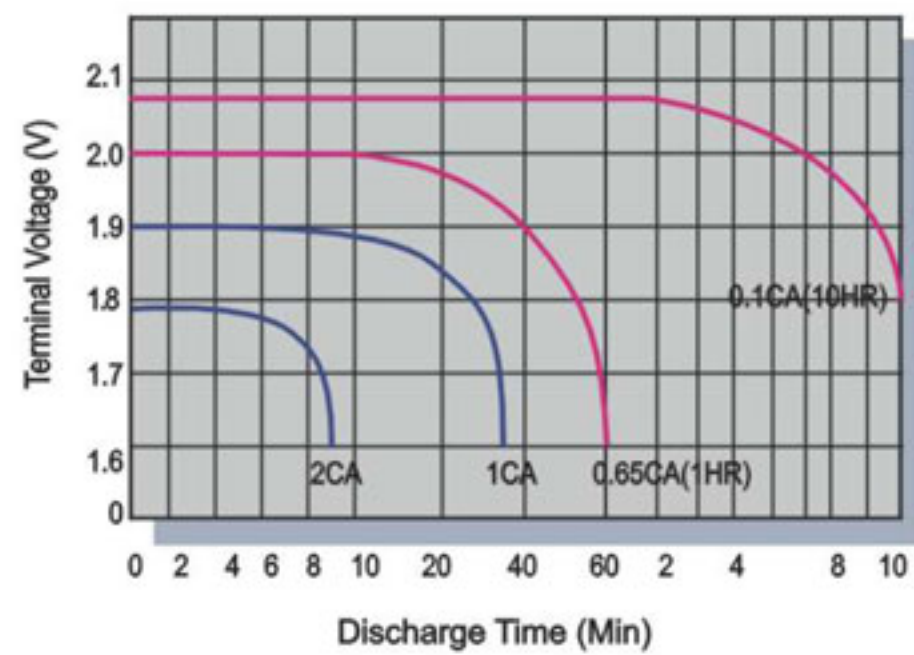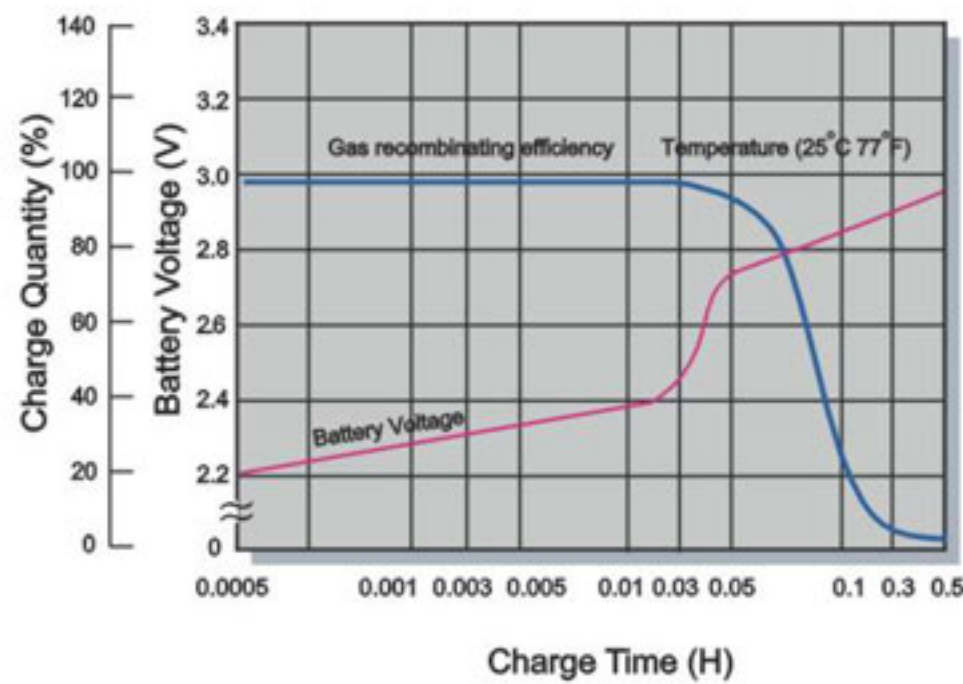

Specifications

Battery Type	Nominal Voltage(V)	Nominal Capacity (10Hr)(Ah)	Weight (Approx. Kg)	Energy Density (Wh/l)	Specific Energy (Wh/kg)	Internal Resistance (Approx. mΩ)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Max. Charging Current (A)	Max. Screw Torque value	
								Overall Height (H)	Container Height (h)	Length (L)	Width (W)		Kgf-cm lb-in	N-m
MU1000S	2	1000	62.50	79.0	32.00	0.35	6,000	497±3.0	486±3.0	303±3.0	172±3.0	300.00	572 496	56.08
MU1500S	2	1500	91.50	82.1	32.79	0.35	9,000	497±3.0	486±3.0	437±3.0	172±3.0	450.00	572 496	56.08

Charging(V) : • Standby Use : 2.275V±0.025V/CELL AT 25°C (77°F) Temp Coefficient -3.3mV/CELL°C

• Cycle Use : 2.45V±0.05V/CELL AT 25°C (77°F) Temp Coefficient -5mV/CELL°C

MU1000S

Constant Current Discharge Characteristics Unit:Amperes(25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	1087	678	509	417	313	246	205	175	137	112
1.67V	1042	662	498	407	306	242	200	172	134	110
1.70V	983	637	483	394	295	235	194	167	130	106
1.75V	901	602	459	377	283	227	188	162	127	104
1.80V	807	553	427	355	267	216	179	155	122	100
1.83V	714	503	394	331	250	204	169	146	117	95.0

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	1707	1173	886	734	554	438	369	317	249	205
1.67V	1678	1152	872	724	548	436	364	315	247	204
1.70V	1642	1121	855	709	534	430	357	311	243	199
1.75V	1541	1066	817	682	515	418	348	303	239	197
1.80V	1420	990	769	650	491	402	335	291	231	190
1.83V	1307	920	725	619	470	388	323	279	225	183

MU1500S**Constant Current Discharge Characteristics Unit:Amperes(25°C, 77°F)**

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	1630	1,017	763	625	470	369	308	263	205	169
1.67V	1563	993	746	610	459	362	301	258	201	165
1.70V	1475	956	725	591	442	353	291	251	195	160
1.75V	1351	904	688	566	425	341	282	243	190	156
1.80V	1210	830	641	497	401	324	269	232	183	150
1.83V	1071	754	591	433	375	305	254	220	175	143

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	2559	1759	1328	1100	832	657	554	476	373	309
1.67V	2516	1728	1306	1086	822	652	548	472	370	305
1.70V	2463	1683	1283	1064	800	646	535	467	365	301
1.75V	2310	1600	1225	1024	774	627	522	454	357	295
1.80V	2130	1486	1154	975	738	603	503	436	346	285
1.83V	1960	1380	1087	929	705	580	485	420	336	276

All information are suggest to change without notification. Please consult CSB website (www.csb-battery.com) for latest information.

SALES OFFICE**GLOBAL HQ**

CSB BATTERY CO., LTD.
5F-1, No.36, Nanjing W. Rd.,
Datong District,
Taipei City 10352 ,
Taiwan (R.O.C.),
Tel: +886-2-2555-5600
Fax: +886-2-2555-3300
E-mail: service@csb-battery.com.tw

FRANCE OFFICE

CSB BATTERY FRANCE S.A. R.L
10, rue Bois Vian
95310 Saint Ouen l'Aumone
France
Tel: +33(0)134201746
Fax: +33(0)134201748
Email: eurosales@csb-battery.eu

IBERICA OFFICE

CSB BATTERY IBERICA S.L
Gran Canaria 37
28970 Humanes de Madrid, Madrid
Spain
Tel: +34 - 916905437
Fax: +34 - 914920471
E-mail: eurosales@csb-battery.eu

BEIJING OFFICE

CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD.
2th Fl. 7G, Future Business Center, Chaoyang
North Rd., Chaoyang District
Beijing, China
Zipcode: 100024
Tel: +86-10-5962-1300 / 1301 / 1302 / 1303
Fax: +86-10-5962-1304
E-mail: chinasls@csb-battery.com

AMERICA HQ

CSB BATTERY TECHNOLOGIES, INC.
2901, White Settlement Rd.
Ft. Worth TX 76107.
U.S.A.
Tel: +1-817-244-7777/1-(800)3
CSBUSA(272872)
Fax: +1-817-244-4445
E-mail: csb@csb-battery.com

BENELUX OFFICE

CSB BATTERY BENELUX B.V
Ridderhaven 32
2984BT Ridderkerk
The Netherlands
Tel: +31(0)180418140
Fax: +31(0)180418327
E-mail: eurosales@csb-battery.eu

GERMANY OFFICE

CSB BATTERY DEUTSCHLAND GMBH
Richtweg 56
90530 Wendelstein
Germany
Tel: +49 - 91294055642
Fax: +49 - 912909056361
E-mail: eurosales@csb-battery.eu

SHANGHAI OFFICE

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
Sec. A, 3Fl., No.6 Building, No.350, Xiya Rd.,
Shanghai Waigaoqiao Trade Zone.
Shanghai, China
Zipcode:200131
Tel: +86-21-5046-1622,5046-0833
Fax: +86-21-5064-3314
E-mail: chinasls@csb-battery.com.tw

EUROPE HQ

CSB BATTERY EUROPE B.V
Ridderhaven 32
2984BT Ridderkerk
The Netherlands
Tel: +31(0)180418140
Fax: +31(0)180418327
E-mail: eurosales@csb-battery.eu

UK OFFICE

CSB BATTERY UK LTD
1 Riverwalk Business Park
Jeffreys Road, EN3 7QN
United Kingdom
Tel: +44(0)2088042991
Fax: +44 (0) 2088058056
E-mail: eurosales@csb-battery.eu

ITALY OFFICE

CSB BATTERY ITALIA S.R.L
Via Cà Nova Zampieri, 18/B
37057 San Giovanni Lupatoto
Verona, Italia
Tel: +39 045 92 50 870
Fax: +39 045 97 82 576
E-mail: eurosales@csb-battery.eu

SHENZHEN OFFICE

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
Room 2103-2105, Block East,
City Professional Hub, Shennan Avenue, Futian
Shenzhen, China
Zipcode: 518053
Tel: + 86-755-2694-2788/2606/2706
Fax: + 86-755-2694-2748
E-mail: she@csb-battery.com.tw

MANUFACTURING SITE**CHINA FACTORY**

CSB BATTERY GUANGZHOU CO., LTD.
No 97, Tianyuan Road, Yonghe Area,
Guangzhou Economic Technology Development
Zone, P.R.C.
Postcode:511356
Tel: +86-20-8297-9716
Fax: +86-20-8297-9719

TAIWAN FACTORY

CSB GUAN TYAN FACTORY (TAIWAN)
No. 16, Gong Yeh West Rd., Eil Jenn Tsuen,
Guan Tyan Hsiang, Tainan Hsien,
Taiwan.
Tel: +886-6-698-7600
Fax: +886-6-698-5734

VIETNAM FACTORY

CSB Battery (Viet Nam) CO., LTD.
Nhon Trach 3 IP, Second Phase ,
Nhon Trach District , Dong Nai Province
Viet Nam
Tel: +84-61-3569120
Fax: +84-61-3569121