



**PREMIUM
QUALITY**

SPORTS POWER®

**ABSORBED GLASS MAT
TECHNOLOGY**

*Advanced
generation
technology for
performance
and life!*



**Ideal for ATVs,
Motorcycles,
Personal Watercraft
& Snowmobiles**

The **Deka Sports Power AGM Battery** was designed for more than performance, it was designed for the enthusiast. Completely spillproof and leakproof; frequent replacement and high maintenance are over! The absorbed glass mat (AGM) technology increases power while improving rider and environmental safety. The key to this technology is the highly porous microfiber separators which completely absorb and trap the electrolyte. Molded top and side connection terminals provide versatility, increased strength and durability. The **Deka Sports Power AGM Battery** provides the most advanced power and value in the industry, so your customers can enjoy their leisure time, worry free.

WORRY FREE...

- No Vent tube
- No acid leaks to cause terminal corrosion
- Withstands damaging effects of vibration
- Environmentally friendly, 100% recyclable

MAINTENANCE FREE...

- No Filling
- No Activation
- Eliminates low water levels
- Low discharge rates for off season storage



QUALITY SYSTEM
CERTIFIED
ISO 9001
ISO/TS 16949
ENVIRONMENTAL
SYSTEM CERTIFIED
ISO 14001


Specifically Engineered for Demanding Sports Power Use!



SPORTS POWER

ABSORBED GLASS MAT TECHNOLOGY

Premium quality, specially designed Absorbed Glass Mat batteries are manufactured under strict quality controls to assure superior performance and long life. The AGM design allows easy installation without the worry of acid spills and damage to equipment.

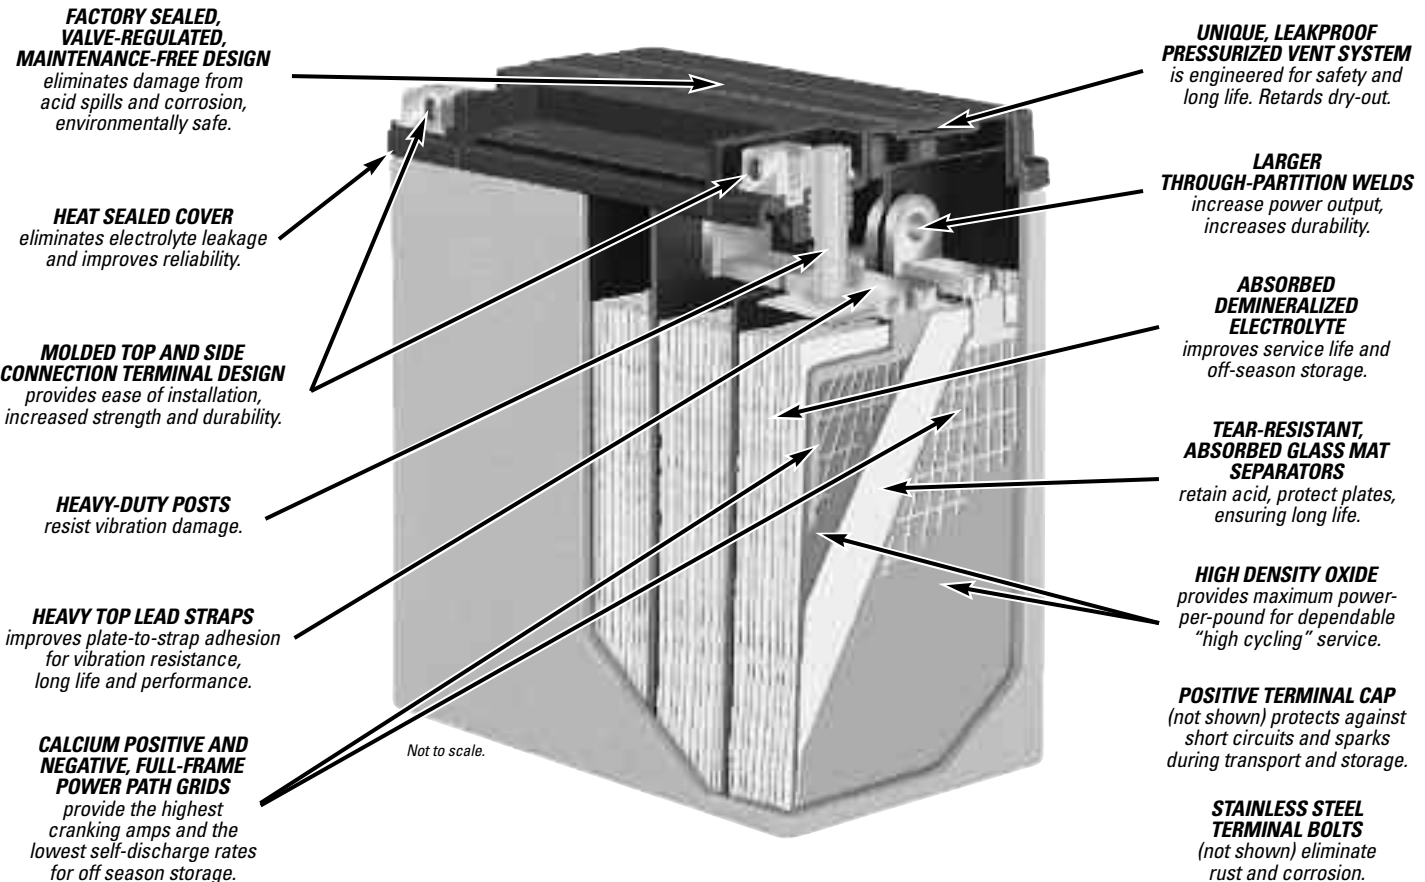

PART NO.	FOOT-NOTES	CCA @ 0°F	10 AH Rating	APPROX. WT.		LENGTH		WIDTH		HEIGHT		Replaces these part numbers:
				lbs.	kg	in.	mm	in.	mm	in.	mm	
ETX9	38,39	120	8	6.3	2.9	5 5/8	150	3 3/16	88	4 3/16	106	YTX9-BS
ETX12	38,39	180	10	9.4	4.3	5 5/8	150	3 3/16	88	5 1/8	130	YTX12-BS, YB12B-B2
ETX14	38,39,42,75	220	12	12.0	5.4	5 5/8	150	3 3/16	88	5 1/8	145	YTX14-BS, YTX16-BS, YTX16-BS-1, YB16B-A, YB16B-A1
ETX14L	38,39,42	220	12	12.0	5.4	5 5/8	150	3 3/16	88	5 1/8	145	YTX14L-BS
ETX15	38,39,42,76	220	14	11.0	5.0	5 5/8	134	3 1/2	90	6 3/16	166	YB14-A2, YB14-B2, YB14A-A1, YB14A-A2
ETX15L	38,39	220	14	11.0	5.0	5 5/8	134	3 1/2	90	6 3/16	166	YB14L-A1, YB14L-A2, YB14L-B2, 12N14-3A, SYB14L-A2, SYB14L-B2
ETX16	38,39,42,74	325	19	17.0	7.7	6 3/8	175	4	100	6 3/8	155	YB16-B-CX, YB16-B, Y60-N24-A (56), YB16C-B
ETX16L	38,39,42,74	325	19	17.0	7.7	6 3/8	175	4	100	6 3/8	155	YB16HL-A-CX, YB16L-B, 12N16-3B, Y60-N24AL-B, YB16CL-B, 12N24-3, 12N24-3A
ETX18L	38,39	340	20	18.0	8.2	8 3/8	206	3 3/16	91	6 3/8	163	Y50-N18L-A-CX, Y50-N18L-A-LM, Y50-N18L-A, Y50-N18L-A3, SY50-N18L-AT
ETX20L	38,39	310	17.5	15.5	7.0	6 3/8	177	3 3/16	88	6 3/8	155	YTX20L-BS, YB18L-A
ETX30L	38,39	400	26	21.7	9.8	6 3/8	168	5 3/16	131	6 3/8	176	YIX30L, YB30LB
ETX30LA	38,39,78	400	26	21.7	9.8	6 3/8	168	5 3/16	131	6 3/8	176	YB30CL-B

All batteries have a black cover and gray case.
FOOTNOTES: 38 – "Non-spillable" defined by DOT (Department of Transportation) definitions

39 – "Non-spillable" defined by ICAO (Int'l Comm. Airline Org.) and IATA (Int'l Airline Transport Assoc.) definitions
 42 – Height without adapter
 74 – Shipped with 20mm adapter

75 – Shipped with two (2) 17mm adapters
 76 – Shipped with 10mm adapter
 78 – Shipped with 22mm height adapter